


DUAL-BAND POCKET RADIO

UV-3R (136-174&400-470MHz)



2W

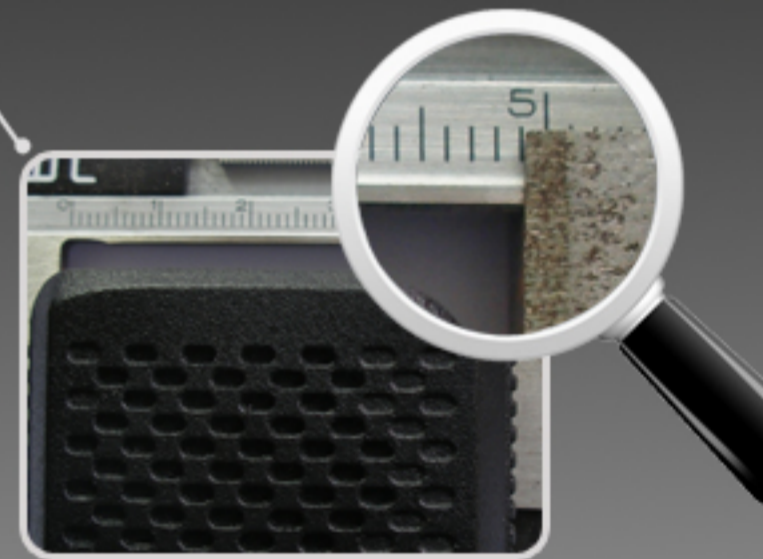

ONLY ACCEPT OEM SERVICES

DUAL-BAND POCKET RADIO

UV-3R

UV-3R Feature:

- Frequency Range:136-174&400-470 MHz
- Dual-Band Display,Dual-Standby
- Output Power: 2 Watts
- 99 Channels + 1 Emergency Channel
- 50 CTCSS And 104 CDCSS
- Built-in Vox Function
- 1750 Hz Brust Tone
- FM Radio (87.0MHz-108.0MHz)
- LED Flashlight
- Large LCD Display
- High/Low Power Switchable
- 25KHz/12.5KHz Switchable
- Emergency Alert
- Low Battery Alert
- Battery Saver
- Time-out Timer
- Keypad Lock
- Monitor Channel

UV-3R Specification:

| GENERAL | |
|-----------------------------------|----------------------|
| Frequency Range | 136-174&400-470 MHz |
| Channel Capacity | 99 CH + 1 CH |
| Channel Spacing | 5/6.25/12.5/25KHz |
| Operated Voltage | 3.8V |
| Battery Capacity | 1500mAh |
| Battery Life | 10 Hours (1:1:8) |
| Frequency Stability | 2.5ppm(-20° C-60° C) |
| Operated Temperature | -30° C-+60° C |
| Antenna Impedance | 50 Ω |
| Dimensions | 81*49*23.8 cm |
| Weight (with battery and antenna) | 120 g |

| TRANSMITTER | |
|------------------------------|-----------------|
| RF Power Output | 2 Watts |
| Modulation | 16KφF3E |
| FM Noise | 45dB(N)/42dB(W) |
| Audio Dsitortion | 5% |
| Adjacent Channel Power | 60dB |
| RECEIVER | |
| Sensitivity (12dB SINAD) | 0.2uV |
| Squelch Selectivity | 0.15uV |
| Adjacent Channel Selectivity | ≥65dB |
| Spurious Response Rejection | -60dB |
| Audio Distortion | ≤10% |

Note:All stated specifications are subject to change without notice or obligation.

UV-3R Standard Accessories

